

Demounting of the stationary part of a shaft seal.

Procedure for all shaft seals except type 129572

1:

Brass flange shown without the stationary part.



Figure 1

2.

Stationary part. The design may differ.

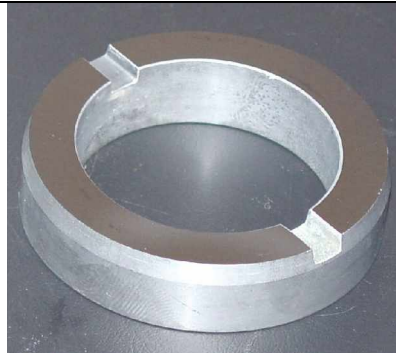


Figure 2

3.

Use an umbracho key to lift the stationary part.

If the part is equipped with two grooves you may use two umbracho keys.

